

Assist Kit

Assembly manual

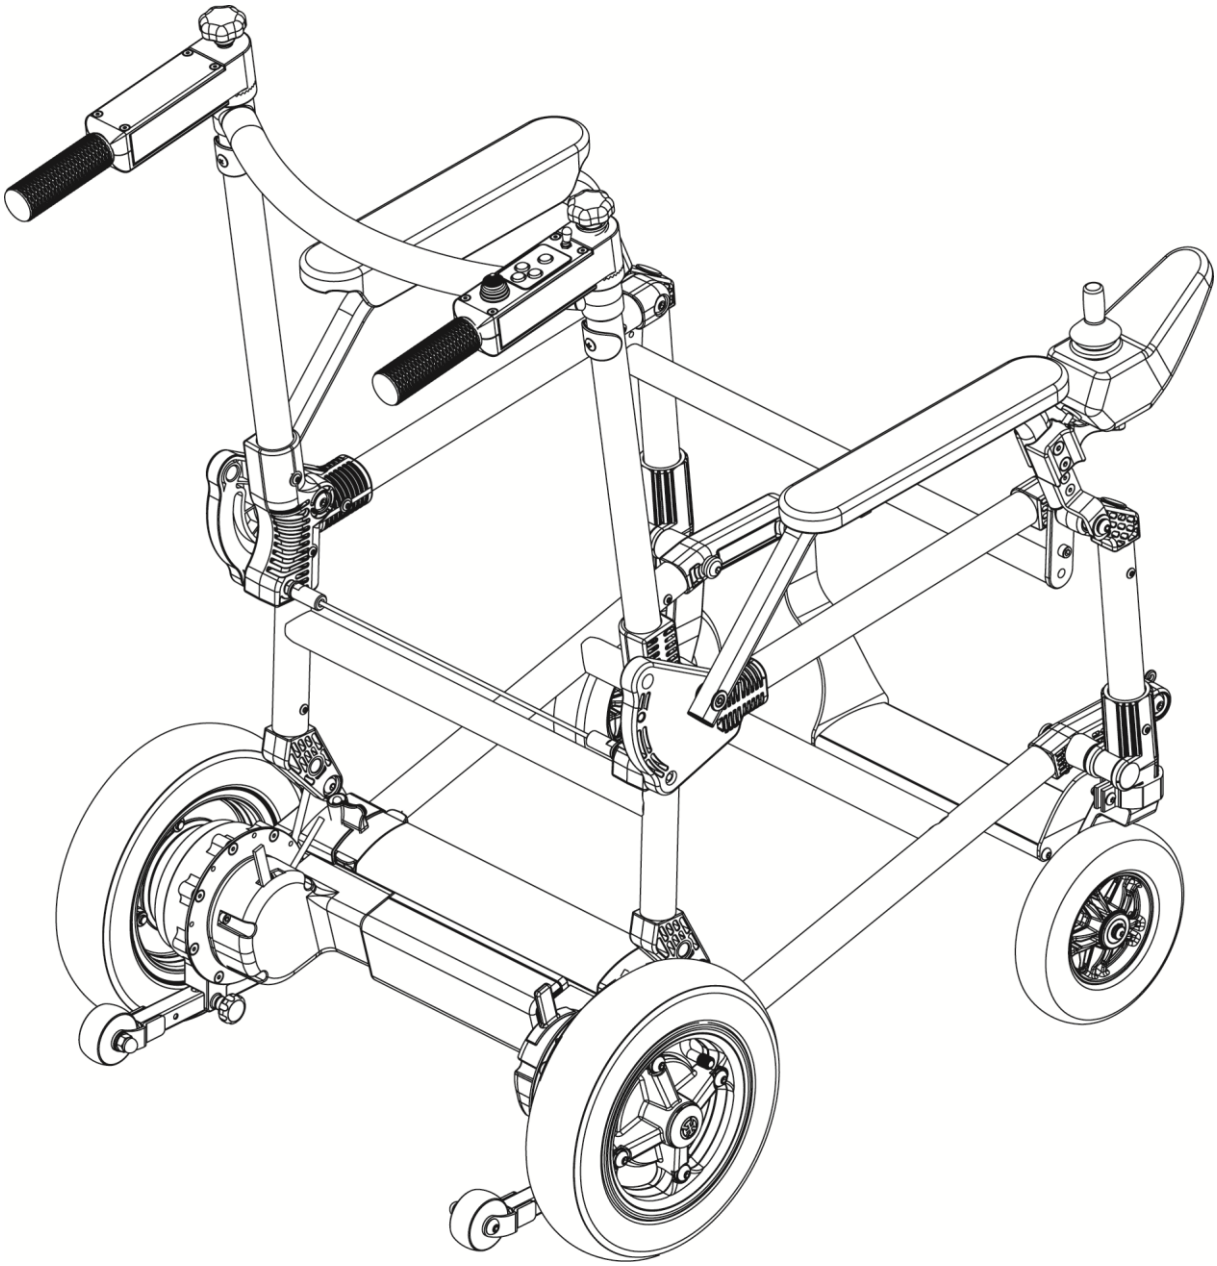

1. Assembly parts

1. Star-shaped knob
   PP-004-038 *2pcs



2. Flat washer
   Φ6xΦ13x1.5t *2pcs



3. Spring washer
   M6 *2pcs




4. Compressing spring
   *2pcs



5. Rear pushing knob seat
   *2pcs



6. Rear pushing rotation fixing seat
   *2pcs



7. Fixing rod for rear pushing rod
   *2pcs



8. O-shaped ring
   Φ5.8XΦ1.9 *2pcs




9. CKS inner hex screw
   M10xP1.5x60 *2pcs




10. CKS inner hex screw
    M6xP1.0x12 *4pcs




11. L-shaped hex wrench
    5mmx25mmx67mm *1pcs




12. L-shaped hex wrench
    8mmx35mmx98mm *1pcs





2. Rear pushing rod-left

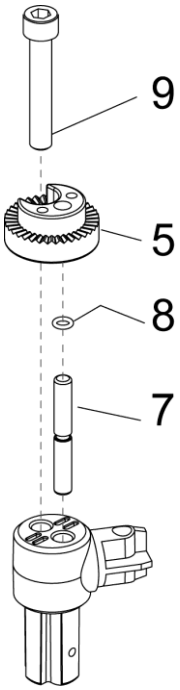
STEP 1	
Place (8) into the groove of (7), and then embed (8) into the rear tube cap head. Secondly, cross (5) through (5), and then lock (5) with (9) to the rear tube cap upper part.	

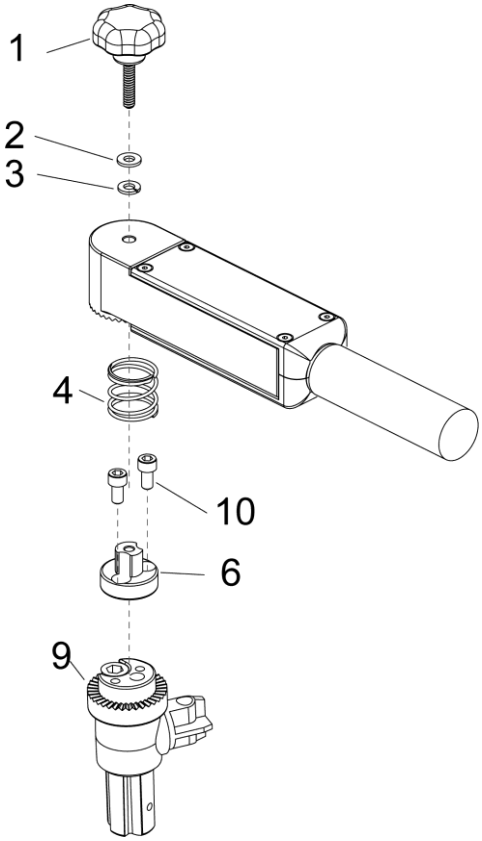STEP 2	
Firstly, fix (6) with (10) to the upper part of the assembled (10). Secondly, place the threading part of (1) into (2) (3), after that the threading part will cross into the upper controller handle bar (just as the image). Embed (4) into upper part of (6), and then place into (6) with upper controller handle bar. Finally, lock upper controller handle bar and (6) with (1).	

3. Rear pushing rod-right

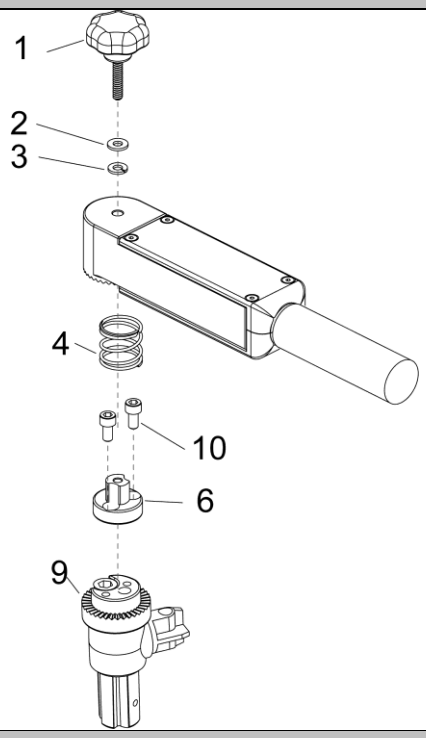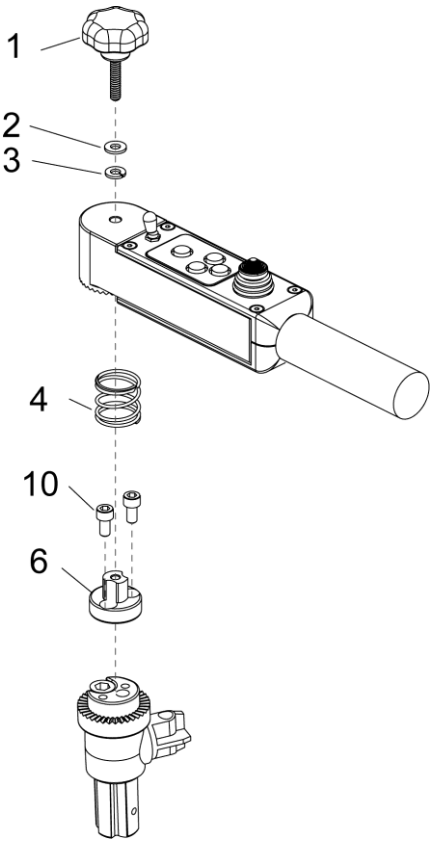STEP 1	
Place (8) into the groove of (7), and then embed (8) into the rear tube cap head. Secondly, cross (5) through (5), and then lock (5) with (9) to the rear tube cap upper part.	
STEP 2	
Firstly, fix (6) with (10) to the upper part of the assembled (10). Secondly, place the threading part of (1) into (2) (3), after that the threading part will cross into the upper controller handle bar (just as the image). Embed (4) into upper part of (6), and then place into (6) with upper controller handle bar. Finally, lock upper controller handle bar and (6) with (1).	

4. Clear up and tie the wires

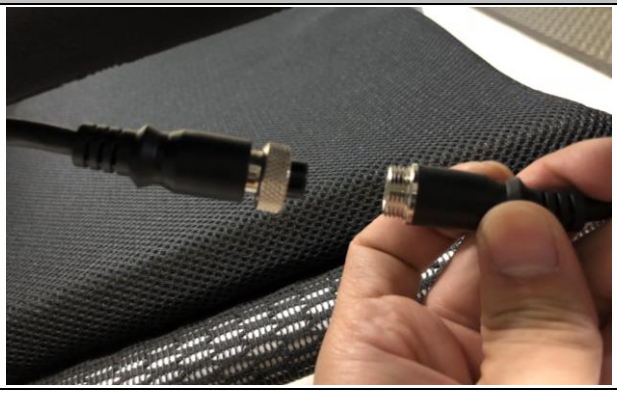STEP 1	
Threading the wire of assist kit through net cloth.	
STEP 2	
Disconnect the connector of wire of joystick and the wire of controller wire.	
STEP 3	
Connect the connector of the wire of joystick with the wire of assist kit.	

STEP 4	
Connect the connector of wire of controller with the other wire of the assist kit.	
STEP 5	
Clear up and tie the wires with hook and loop fastener.	